FTP Cat5e 4P 24AWG LSZH Or.

Application

- Ethernet IEEE 802.3: 1000 BASE-T, 100 BASE-TX, 10 BASE-T, PoE, PoE+
- CDDI, Token Ring, ATM
- Broadband and Baseband Analog Video, Voice
- Noisy (EMI) Environments

Standards

- ISO/IEC 11801
- IEC 61156
- TIA/EIA-568C
- EN 50173-1
- IEC 60754

RoHS COMPLIANT

Cable construction

Conductor	Material	Solid -Bare Coper
	Diameter (mm)	0.505±0.005
Insulation	Material	HDPE
	Diameter (mm)	0,98±0.05
Color	A. Blue, White-Blue	B. Orange, White-Orange
	C. Green, White-Green	D. Brown, White-Brown
Drain wire	0.4 mm Bare Copper	
Rip-cord	Yes	
Shielded	PET film AL Foil	
Sheath	Material	Low Smoke Zero Halogen (LSZH)
	Thickness (mm)	0.5
	External Diameter (mm)	6.1±0.3
	Color	Orange (Or.)

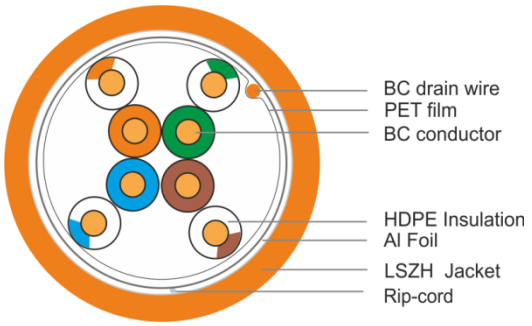

Transmission performance

F MHz	RL ≥dB	ATT ≤dB	NEXT ≥dB	DELAY ≤ns	PSNEXT ≥dB	ELFEXT ≥dB	PSELFEXT ≥dB
1.0	20.0	2.0	65.3	570	62.3	63.8	60.8
4.0	23.0	4.1	56.3	552	53.3	51.8	48.8
8.0	24.5	5.8	51.8	547	48.8	45.7	42.7
10.0	25.0	6.5	50.3	545	47.3	43.8	40.8
16.0	25.0	8.2	47.2	543	44.2	39.7	36.7
20.0	25.0	9.3	45.8	542	42.8	37.8	34.8
25.0	24.3	10.4	44.3	541	41.3	35.8	32.8
31.25	23.6	11.7	42.9	540	39.9	33.9	30.9
62.5	21.5	17.0	38.4	539	35.4	27.9	24.9
100.0	20.1	22.0	35.3	538	32.3	23.8	20.8

Delay Skew (ns/100m)	≤ 45	1.0-100.0 MHz
Characteristic Impedance (Ω)	100±15	1.0-100.0 MHz
DC Conductor Resistance (Ω/100m)	≤9.38	20°C
DC Resistance Unbalance (%)	≤ 2.5	
Mutual capacitance (nF/100m)	≤ 5.6	
Dielectric strength (kV, during 1 min)	1	DC. 1 min

Mechanical and environmental characteristics

Max Cable Tensile Strength	85 N
Min Cable Bending Radius	8 OD
Operational Temperature	-20°C ~ +60°C

Packaging

Packing	Carton, pallet/pull box
Packing dimension	40×40×24cm
Packing length	305m